


PARAMETERS

Impedance	8 ohms
Re	5.7 ohms
Le	0.12 mH
Fs	394.3 Hz
Qms	4.27
Qes	1.39
Qts	1.05
Mms	N/A
Cms	N/A
Sd	26.4 cm ²
Vd	N/A
BL	N/A
Vas	N/A
Xmax	1mm
VC Diameter	2"
SPL	90.0 dB @ 2.83V/1m
RMS Power Handling	60 watts
Usable Frequency Range (Hz)	500 - 8,500 Hz


FEATURES

- Large damped rear chamber for low resonance point
- 2" damped fabric diaphragm for natural response and dispersion
- Neodymium keeps size and weight to a minimum without sacrificing efficiency
- Copper clad motor reduces distortion for transparent sound

IMPEDANCE/PHASE

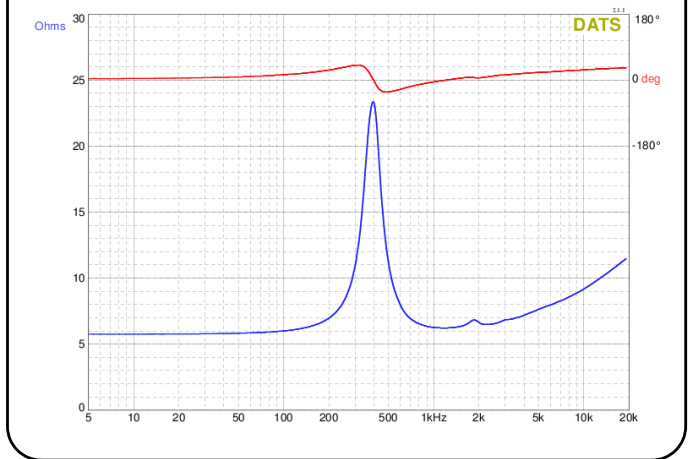

FREQUENCY RESPONSE

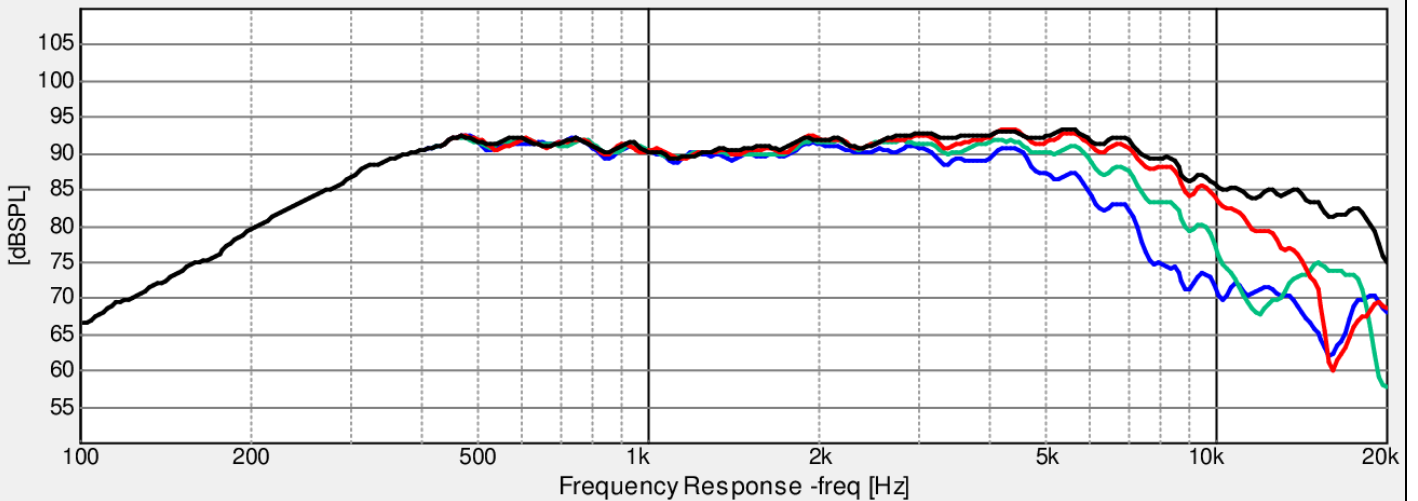

OmniMic

Note: 1/24th octave smoothing - nearfield response included in graph below 450 Hz.

Black = 0°
Red = 15°
Green = 30°
Blue = 45°