


Specs :

Nominal Impedance	8 Ω	Free air resonance, Fs	160 Hz
DC resistance, Re	5.8 Ω	Sensitivity (2.83 V / 1 m)	75 dB
Voice coil inductance, Le	0.13 mH	Mechanical Q-factor, Qms	1.75
Effective piston area, Sd	4.2 cm ²	Electrical Q-factor, Qes	0.92
Voice coil diameter	20.4 mm	Total Q-factor, Qts	0.61
Voice coil height	5.5 mm	Moving mass incl.air, Mms	0.7 g
Air gap height	2.0 mm	Force factor, Bl	2.1 Tm
Linear coil travel (p-p)	3.5 mm	Equivalent volume, Vas	0.035 liters
Magnetic flux density	0.85 T	Compliance, Cms	1.39 mm/N
Magnet weight (NEO)	0.01 kg	Mechanical loss, Rms	0.4 kg/s
Net weight	0.055 kg	Rated power handling*	5 W

*IEC 268-5, high-pass Butterworth, 200 Hz, 12 dB/oct, T/S parameters measured on drive units that are broken in.

FEATURES

- Long stroke low damping surround
- Vented low compression design
- Resonance and break-up control
- Low resonance frequency
- Prepared for rear mounting
- Long life silver lead wires

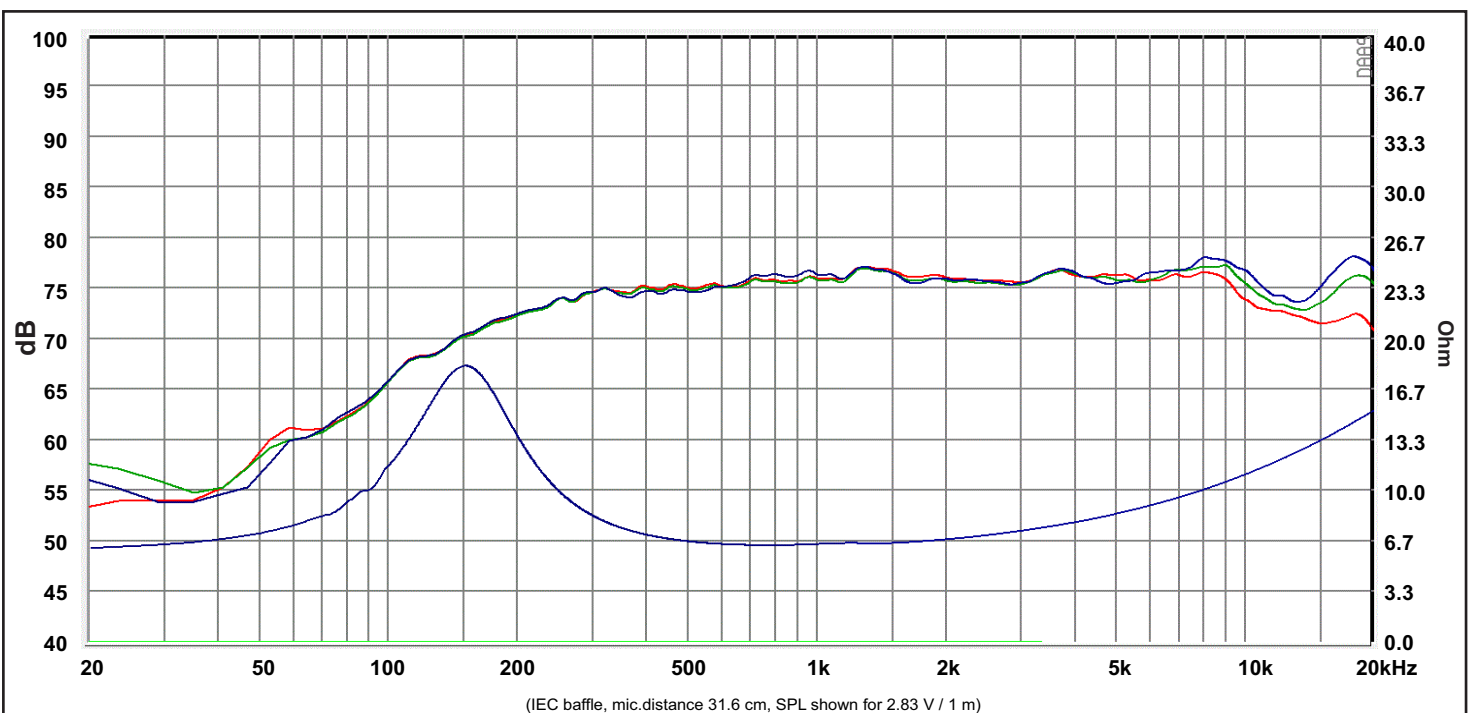

Response Curve :
 — (Blue) : on axis

— (Green) : 30° off-axis

— (Red) : 60° off-axis

REV.1 (21.07.2017)