


- Pressed Steel Basket
- Ferrite Magnet
- Paper Diaphragm
- NBR Rubber Surround
- Optimized for Sealed Enclosures

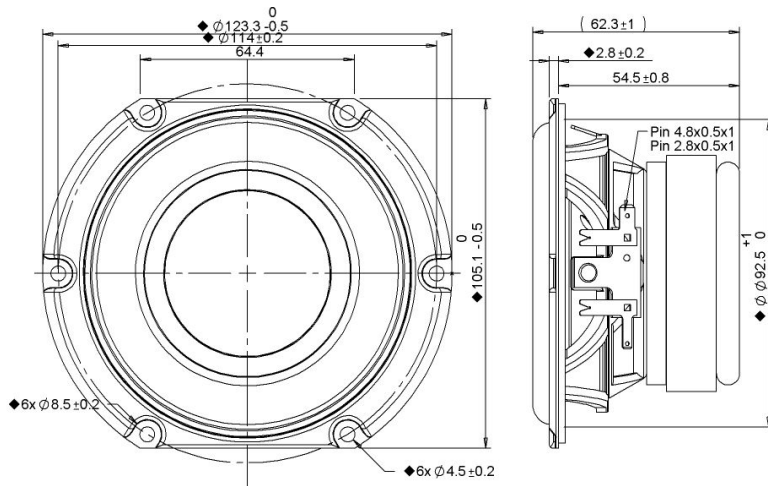


SPECIFICATIONS

Transducer Size	4	in
Impedance	8	Ω
Frequency Range ¹	60 - 5000	Hz
Sensitivity ² (2.83V 1W @ 1m)	83.1 83.1	dB
Power Rating (IEC 268-5)	30	W
Voice Coil Size	25.8	mm
Air Gap Winding Height	H_{ag} H_{vc}	6 12 mm
Net Weight	0.74	kg

PARAMETERS ³

Eff. Piston Area	S_d	50.3	cm ²
DC Resistance	R_e	5.6	Ω
Minimum Impedance	Z_{min}	6.3	Ω
Inductance	L_e	0.343	mH
Resonance Frequency ⁴	F_s	66	Hz
Mechanical Q Factor	Q_{ms}	4.56	-
Electrical Q Factor	Q_{es}	0.539	-
Total Q Factor	Q_{ts}	0.48	-
Moving Mass	M_{ms}	6.3	g
Compliance	C_{ms}	910	$\mu\text{m}/\text{N}$
Equivalent Volume	V_{as}	3.26	L
Motor Force Factor	Bl	5.24	Tm
Motor Efficiency	β	4.88	$(Bl)^2 / R_e$
Linear Excursion ⁵	X_{max}	5.01	mm
Max Mechanical Excursion ⁶	X_{mech}	-	mm

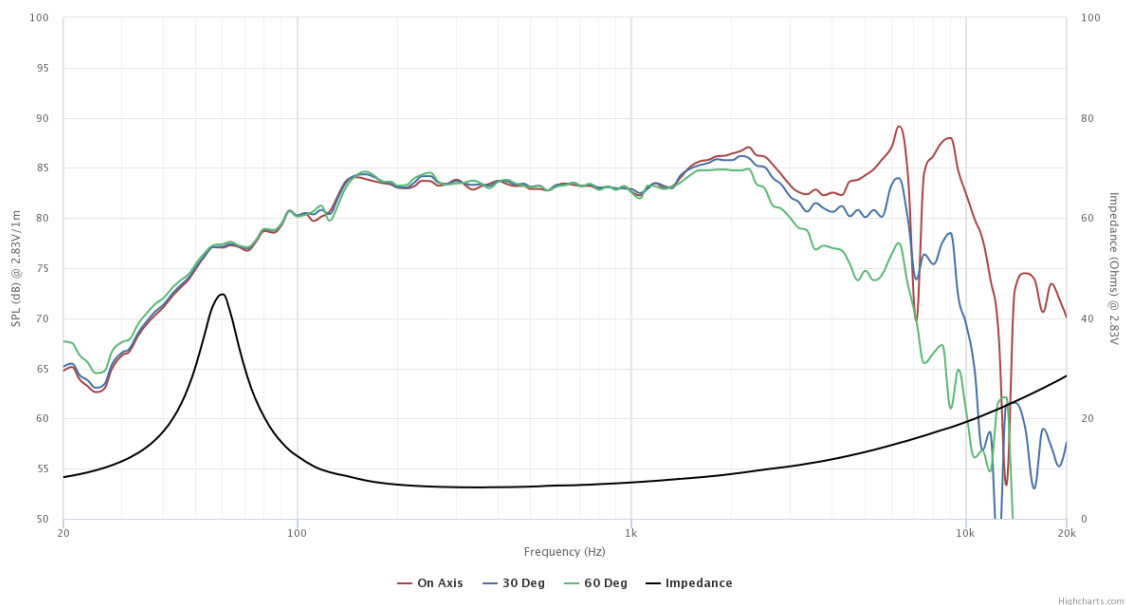

Details on this spec sheet are for reference only and should not be used for setting production limits. Specifications and product cosmetics are subject to change without notice. Peerless is a registered trademark of Tympany Enterprises. All measurements conducted in test lab at 25°C ±10°C, 50%RH ±10%. ¹ Specified by Engineering as linear working range of transducer. ² Measured at 2.83V at 1m and normalized to 1W with respect to nominal impedance. ³ Measured in Free Air without preconditioning, therefore subject to some deviation. ⁴ Impedance and F_s value measured under different conditions. ⁵ Equal/Overhung: $(H_{vc} - H_{ag})/2 + H_{ag}/3$. Underhung: $(H_{ag} - H_{vc})/2 + H_{vc}/3$. ⁶ Mechanically limited excursion (e.g. bottoming, spider crash).